



WOODWORKING SCREWS **European Drawer Slide Screws**

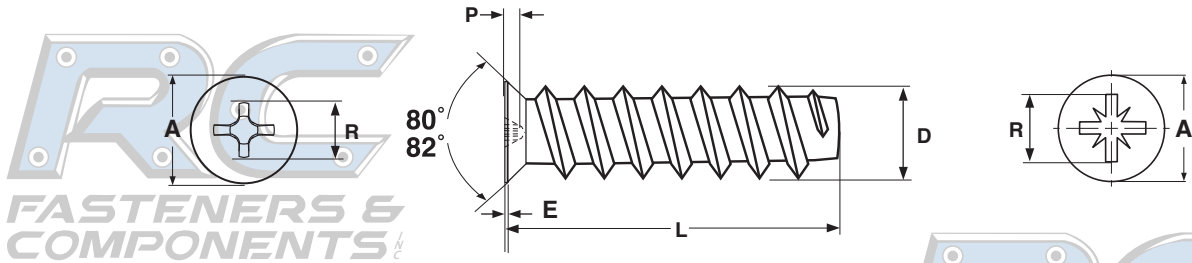

| EUROPEAN DRAWER SLIDE SCREWS | | | | | | | | | | | | | | |
|------------------------------|---------------|------|-------------|------|------------|----------------------|------|------------|--------------|------|----------------------------|------|----------------|------|
| Size | A | | P | | | P | | | R | | E | | D | |
| | Head Diameter | | Phillips | | | Pozi (Type Z Recess) | | | Recess Width | | Top Edge of Head Thickness | | Major Diameter | |
| | | | Penetration | | Drive Size | Penetration | | Drive Size | | | | | | |
| | Max | Min | Max | Min | | Max | Min | | Max | Min | Max | Min | Max | Min |
| 6.3-11 | 7.30 | 7.00 | 3.17 | 2.59 | #2 | 2.70 | 2.40 | #2 | 5.18 | 4.86 | 0.30 | 0.10 | 6.30 | 6.10 |
| Tolerance on Length | | | | | | | | | +0, -0.5 | | | | | |

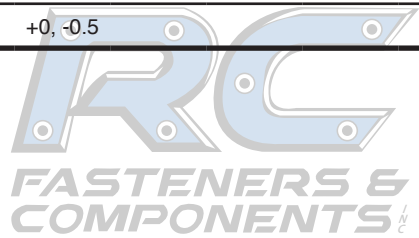

| | |
|----------------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Description | An externally threaded fastener with a short, 82-degree countersunk head, and spaced thread pattern. The part is available with choice of Phillips or Pozi (Type-Z) recess. |
| Applications / Advantages | Designed for installation of European hinges and European drawer slides into cabinets that use a 32mm line boring layout with pre-drilled holes.. |
| Material | Low Carbon 1010 or equivalent steel |
| Plating | Screws are typically available in either a zinc or nickel finish. |

