
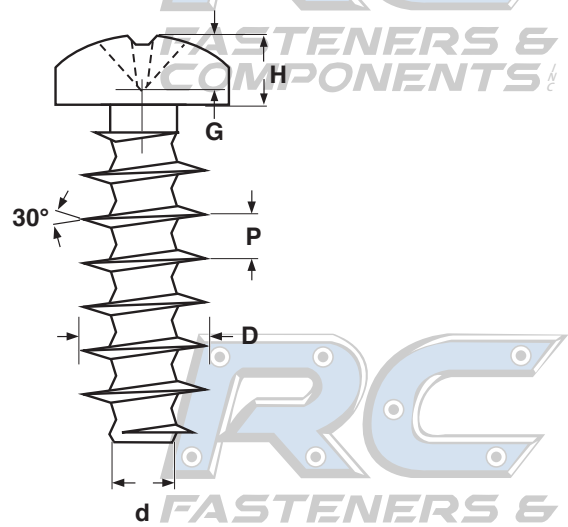


Type-PT® Alternative Pan Phillips **THREAD FORMING SCREWS**

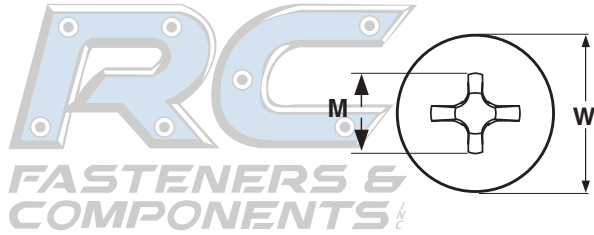

METRIC - TYPE PT®-ALTERNATIVE THREAD FORMING SCREWS, PAN PHILLIPS													
Screw Size	P	D			d	W		H		M	G		Drive Size
	Thread Pitch	External Thread Diam.		Thread Core	Diameter		Height		Diameter	Gauge Penetration			
		Max	Min	Ref	Max	Min	Max	Min	Max	Max	Min		
M1.6	0.67	1.74	1.60	0.92	2.60	2.32	1.10	0.90	1.60	0.85	0.55	0	
M2.2	0.98	2.34	2.20	1.25	3.90	3.62	1.60	1.40	2.40	1.21	0.85	1	
M2.5	1.12	2.64	2.50	1.40	4.40	4.12	1.80	1.60	2.60	1.42	1.05	1	
M3	1.34	3.14	3.00	1.66	5.30	5.02	2.10	1.90	2.90	1.65	1.24	1	
M3.5	1.57	3.68	3.50	1.91	6.10	5.82	2.60	2.40	4.0	1.86	1.23	2	
M4	1.79	4.18	4.00	2.17	7.00	6.72	2.80	2.60	4.30	2.14	1.51	2	
M5	2.24	5.00	4.82	2.68	8.80	8.52	3.32	3.08	4.9	2.75	2.12	2	
Tolerance on Length					3 ~ 6mm: ± 0.30 mm				7 ~ 10mm: ± 0.40 mm				
					11 ~ 30mm: ± 0.50 mm				31 ~ 80mm: ±0.65 mm				

Description	A spaced thread fastener with a head that has a gently rounded top, cylindrical sides and a flat bearing surface that is 90° to the screw's shank. When compared to a Plastite®-alternative thread rolling screw, the PT®-alternative threads are wider and have a sharper angle. Furthermore, the core of the shank has a reduced diameter between each consecutive set of threads. The point opposite the head is blunt.	
Applications/ Advantages	Designed to form its own thread in thermoplastic materials. The 30° thread angle reduces the outward expansion of the material being displaced. The recessed design of the thread root enables more material to flow into the area between threads. The depth of the thread pattern increases the fastener's load carrying properties while resisting vibrations, thus resisting loosening.	
Material	Steel Diameters M3 & smaller: Case-Hardened C1022 Steel Diameters M3.5 and larger: Through-hardened C1022 Steel	Stainless A2 Stainless
Core Hardness	HV 270 - 390	-
Surface Hardness	HV 450 min.	-

Type PT® is a registered trademark of EJOT Verbindungstechnik GmbH & Co. KG.