



FASTENERS & COMPONENTS

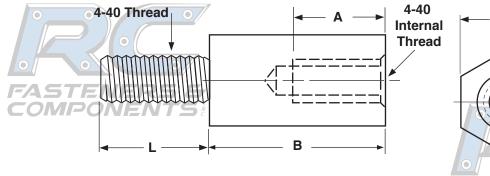



			3/	16 Hex J	ACKSCRE	NS			
	A			B Body Length		Across the Flats		External Thread Size	Internal Thread Size
Part Number	Inread I -		f External ead						
CO	Min	Max	[∕] ℓMin	Мах	Min	Max	Min	0	0/
100304JM	.100	.188	.182		.1825	.1875	.1825	4-40	4-40
100404JM		.250	.245	.1875					
100504JM		.313	.307						
100604JM		.375	.370						
100704JM		.438	.432						
100804JM		.500	.495						
100904JM		.563	.557						
101004JM		.625	.620						

FASTENERS &

Description	A hex shaped mechanical device that has an opening with a partial internal thread at one end, and an externally threaded post at the opposite end.						
Applications/ Advantages	Used to mount D-subminiature connectors to a metal panel, such as the housing of a personal computer tower.						
Material	Steel: Low Carbon Steel Stainless: Class 303 Stainless						

