



# MALLEABLE WIRE ROPE CLIPS



Clips supplied with self-colored, galvanized or hot galvanized finish. U-bolts for clips are available with or without nuts — price on application.



Should be used  
only in  
light duty applications

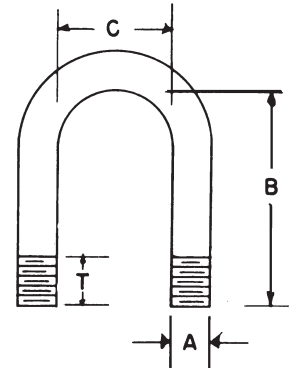

Meets Performance Requirements of Federal Specification FF-C-450, Type 1, Class 2  
Some sizes available in Stainless Steel. See page 47.

|           | Self-Colored | Galvanized | Hot Galvanized | U-Bolt Dimensions |          |          |        | Weight  |
|-----------|--------------|------------|----------------|-------------------|----------|----------|--------|---------|
| Rope Size | Part No.     | Part No.   | Part No.       | A                 | B        | C        | T      | Per 100 |
| 3/32"     | 23005 6      | 23155 8    | N.A.           | 10-24             | 3/4"     | 19/64"   | 1/2"   | 3.7     |
| 1/8"      | 23010 0      | 23160 2    | N.A.           | 1/4"-20           | 15/16"   | 5/16"    | 5/8"   | 6.5     |
| 3/16"     | 23015 5      | 23165 7    | N.A.           | 1/4"-20           | 15/16"   | 5/16"    | 5/8"   | 6.8     |
| 1/4"      | 23020 9      | 23170 1    | 23320 0        | 5/16"-18          | 1-5/32"  | 3/8"     | 3/4"   | 12.2    |
| 5/16"     | 23025 4      | 23175 6    | 23325 5        | 5/16"-18          | 1-5/32"  | 3/8"     | 3/4"   | 12.2    |
| 3/8"      | 23030 8      | 23180 0    | 23330 9        | 3/8"-16           | 1-1/2"   | 1/2"     | 1"     | 18.5    |
| 7/16"     | 23035 3      | 23185 5    | 23335 4        | 3/8"-16           | 1-1/2"   | 1/2"     | 1"     | 24      |
| 1/2"      | 23040 7      | 23190 9    | 23340 8        | 7/16"-14          | 1-13/16" | 9/16"    | 1-1/8" | 33.3    |
| 9/16"     | 23045 2      | 23195 4    | 23345 3        | 1/2"-13           | 2-1/8"   | 11/16"   | 1-3/8" | 51.5    |
| 5/8"      | 23050 6      | 23200 5    | 23350 7        | 1/2"-13           | 2-1/8"   | 11/16"   | 1-3/8" | 55.9    |
| 3/4"      | 23055 1      | 23205 0    | 23355 2        | 9/16"-12          | 2-11/16" | 13/16"   | 1-5/8" | 80.8    |
| 7/8"      | 23060 5      | 23210 4    | 23360 6        | 5/8"-11           | 3-1/4"   | 1-1/8"   | 1-7/8" | 140     |
| 1"        | 23065 0      | 23215 9    | 23365 1        | 5/8"-11           | 3-1/4"   | 1-1/8"   | 1-7/8" | 150     |
| 1-1/8"    | 23070 4      | 23220 3    | N.A.           | 3/4"-10           | 4-3/8"   | 1-5/16"  | 2-1/2" | 263     |
| 1-1/4"    | 23075 9      | 23225 8    | N.A.           | 3/4"-10           | 4-3/8"   | 1-5/16"  | 2-1/2" | 300     |
| 1-3/8"    | 23080 3      | 23230 2    | N.A.           | 7/8"-9            | 5-1/8"   | 1-11/16" | 2-3/4" | 441     |
| 1-1/2"    | 23085 8      | 23235 7    | N.A.           | 7/8"-9            | 5-1/8"   | 1-11/16" | 2-3/4" | 488     |
| 1-3/4"    | 23095 7      | 23245 6    | N.A.           | 1"-8              | 6-1/4"   | 2-1/16"  | 3-3/4" | 899.5   |
| 2"        | 23100 8      | 23250 0    | N.A.           | 1"-8              | 7-1/4"   | 2-1/2"   | 4"     | 1285    |

**TILLER  
ROPE  
CLAMPS**



| Rope Diameter | Part No. | Overall Length | Overall Width | Weight Per 100 |
|---------------|----------|----------------|---------------|----------------|
| 1/8"          | 27910 9  | 1-5/8"         | 3/4"          | 10 Lbs.        |
| 3/16"         | 27920 8  | 1-3/4"         | 3/4"          | 12 Lbs.        |

Malleable iron castings hot galvanized finish. Furnished with brass flat head machine screws.