
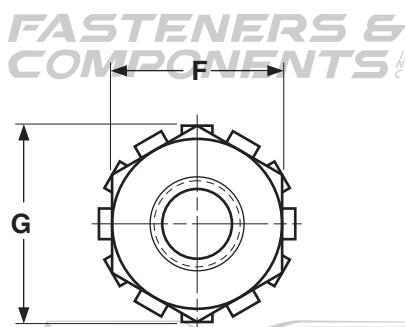
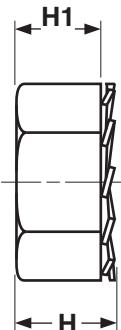


## Steel &amp; Stainless

## EXTERNAL TOOTH K-LOCK

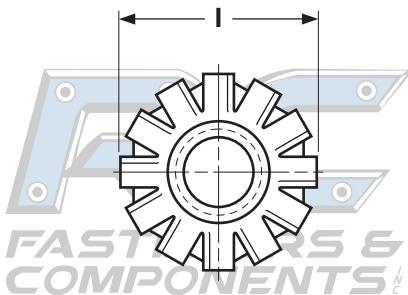

Shakeproof\*  
#501-01

## "K" Lock Nuts

Nominal Size or Basic Thread Diameter		F			G		H1	I
		Width Across Flats			Width Across Corners		Nut Thickness	Washer Diameter
		Basic	Max	Min	Max	Min	Max	Min
4	0.1120	1/4	0.250	0.241	0.289	0.275	0.098	0.087
5	0.1250	5/16	0.312	0.302	0.361	0.344	0.114	0.102
6	0.1380	5/16	0.312	0.302	0.361	0.344	0.114	0.102
6 SP	0.1380	1/4	0.250	0.241	0.289	0.275	0.098	0.087
8	0.1640	11/32	0.344	0.332	0.397	0.378	0.130	0.117
8 SP	0.1640	5/16	0.312	0.302	0.361	0.344	0.114	0.102
10	0.1900	3/8	0.375	0.362	0.433	0.413	0.130	0.117
12	0.2160	7/16	0.438	0.423	0.505	0.482	0.161	0.148
1/4	0.2500	7/16	0.438	0.423	0.505	0.482	0.193	0.178
5/16	0.3125	1/2	0.500	0.489	0.577	0.557	0.273	0.258
3/8	0.3750	9/16	0.562	0.551	0.650	0.628	0.337	0.320
1/2	0.5000	3/4	0.750	0.736	0.866	.840	0.437	0.425
								0.898
								0.878

"SP" denotes a "small pattern" across the flats.

\*Shakeproof standard #501-01 does not specify dimensions for the #5, #8 SP and 1/2" diameters.

Description	A hex nut pre-assembled with a free spinning external tooth lock washer. The locking action is achieved when the nut is tightened against a bearing surface as the teeth of the lock washer dig into it.
Applications/ Advantages	This is the most popular type of locknut because of its versatility, cost and ease of installation. Doesn't gall screw threads.
Material	<b>Steel:</b> Nuts-- AISI 1008-1020 or equivalent steel; Washers-- 1050-03 or equivalent steel. <b>Stainless:</b> Nuts-- One of the following austenitic alloys: 302, 303, 303Se, 304, XM7; Washers-- 420 stainless.
Hardness	<b>Steel:</b> Washers-- Rockwell C38 minimum, C44 maximum <b>Stainless:</b> Washers-- Rockwell C40 - 50
Plating	See Appendix-A for information about the plating of steel nuts.

\*Shakeproof is the original writer of K-lock nut specifications.